

Figure 1: Adhesive A
Surface Roughness Effects on FTV Performance
Evaluation Temperature Range: -36°C to -67°C
Syringe Thickness: 0.762 mm

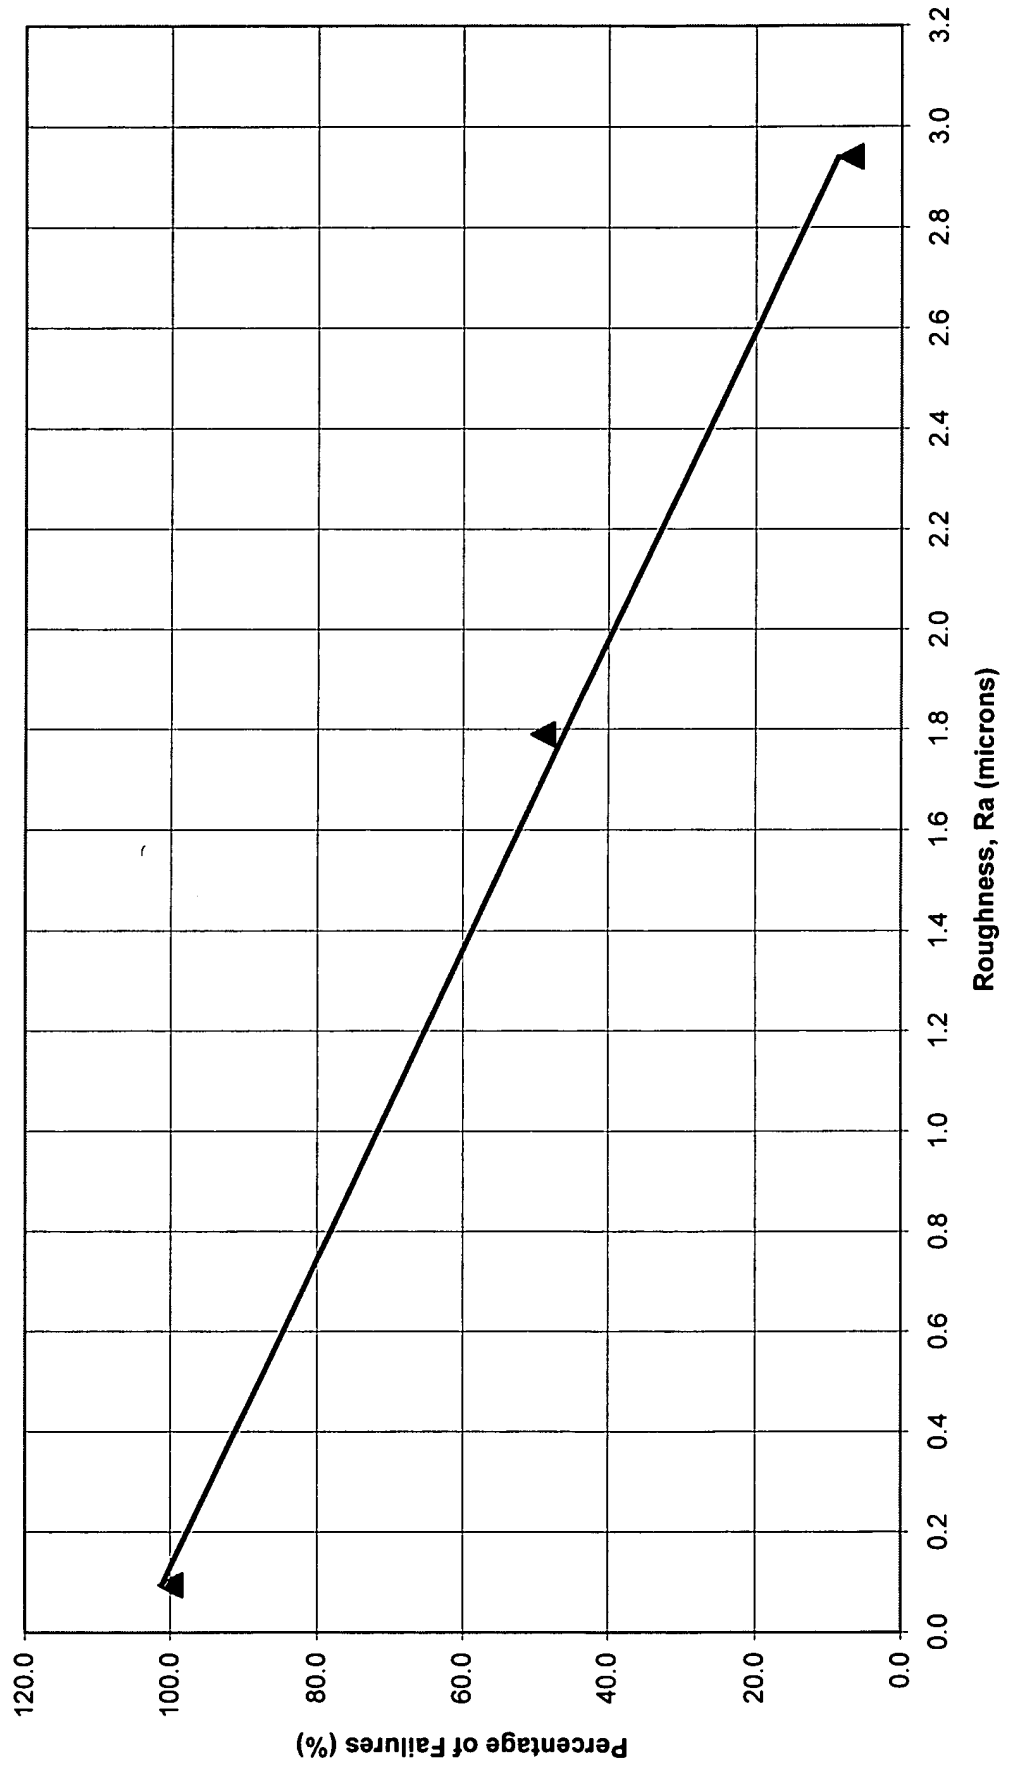


Figure 2: Adhesive A
Wall Thickness Effects on FTV Performance
Evaluation Temperature Range: -67°C to -36°C
Syringe Roughness (Ra): 2.9 microns

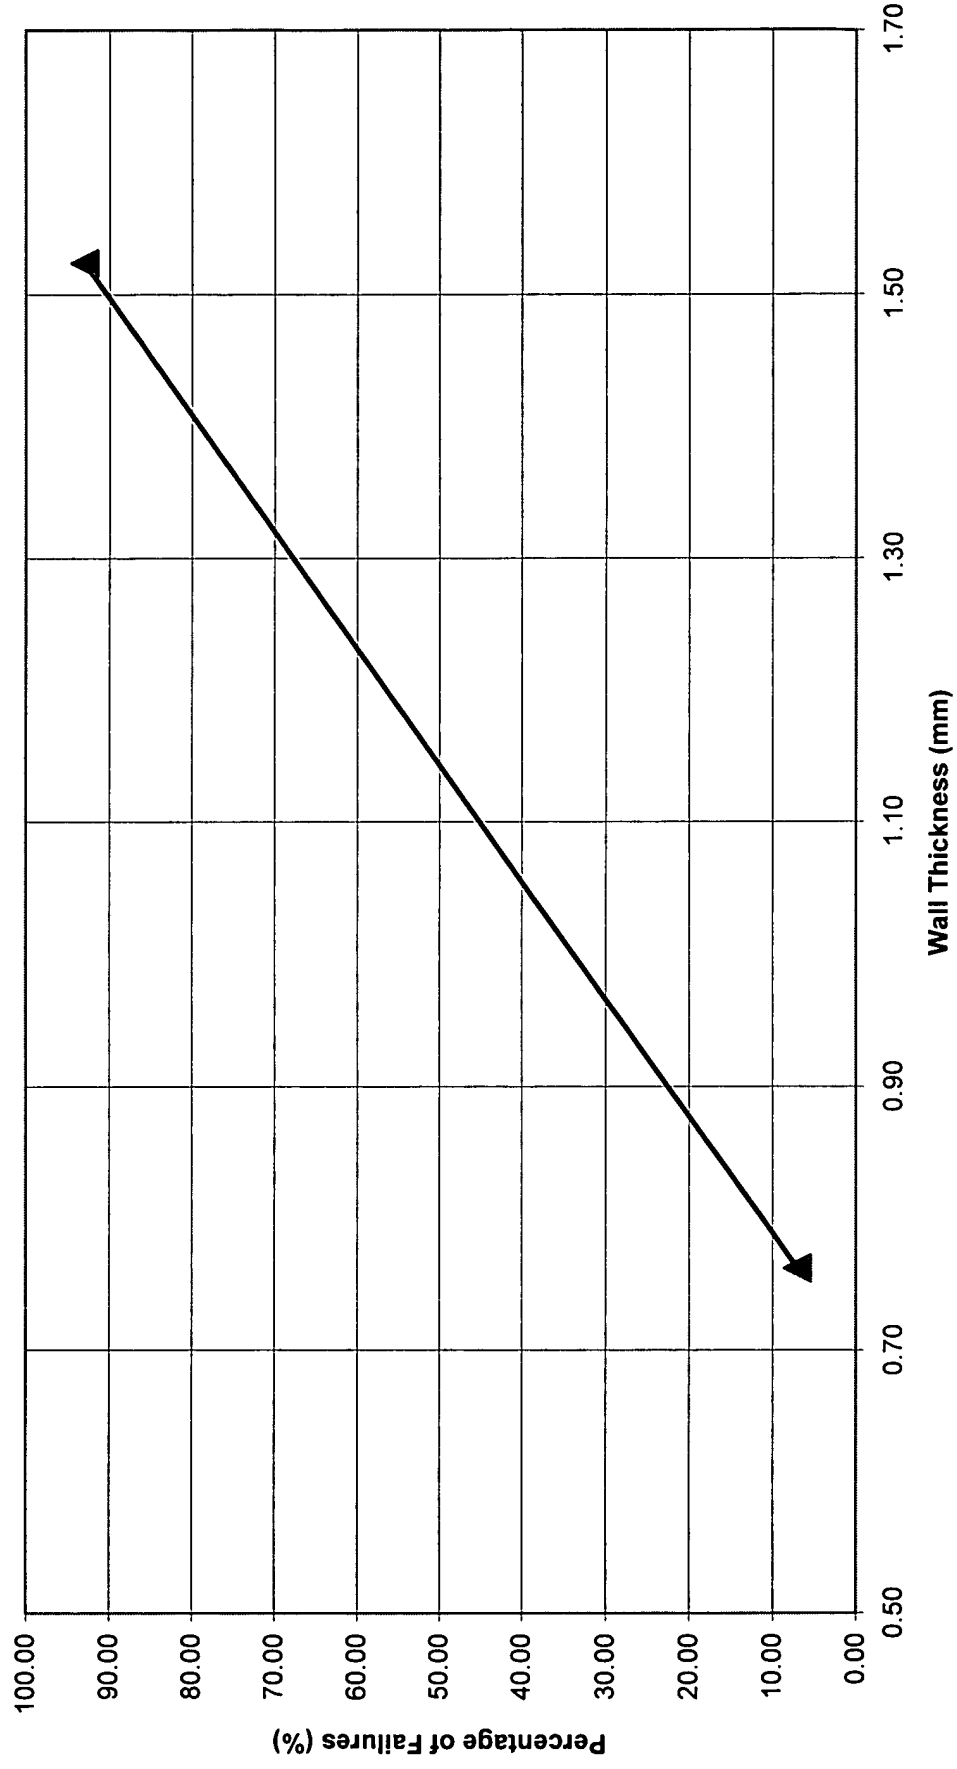


Figure 3: Adhesive B
Surface Roughness Effects On FTV Performance
Evaluation Temperature Range: -45°C to -65°C
Syringe Thickness: 1.524 mm

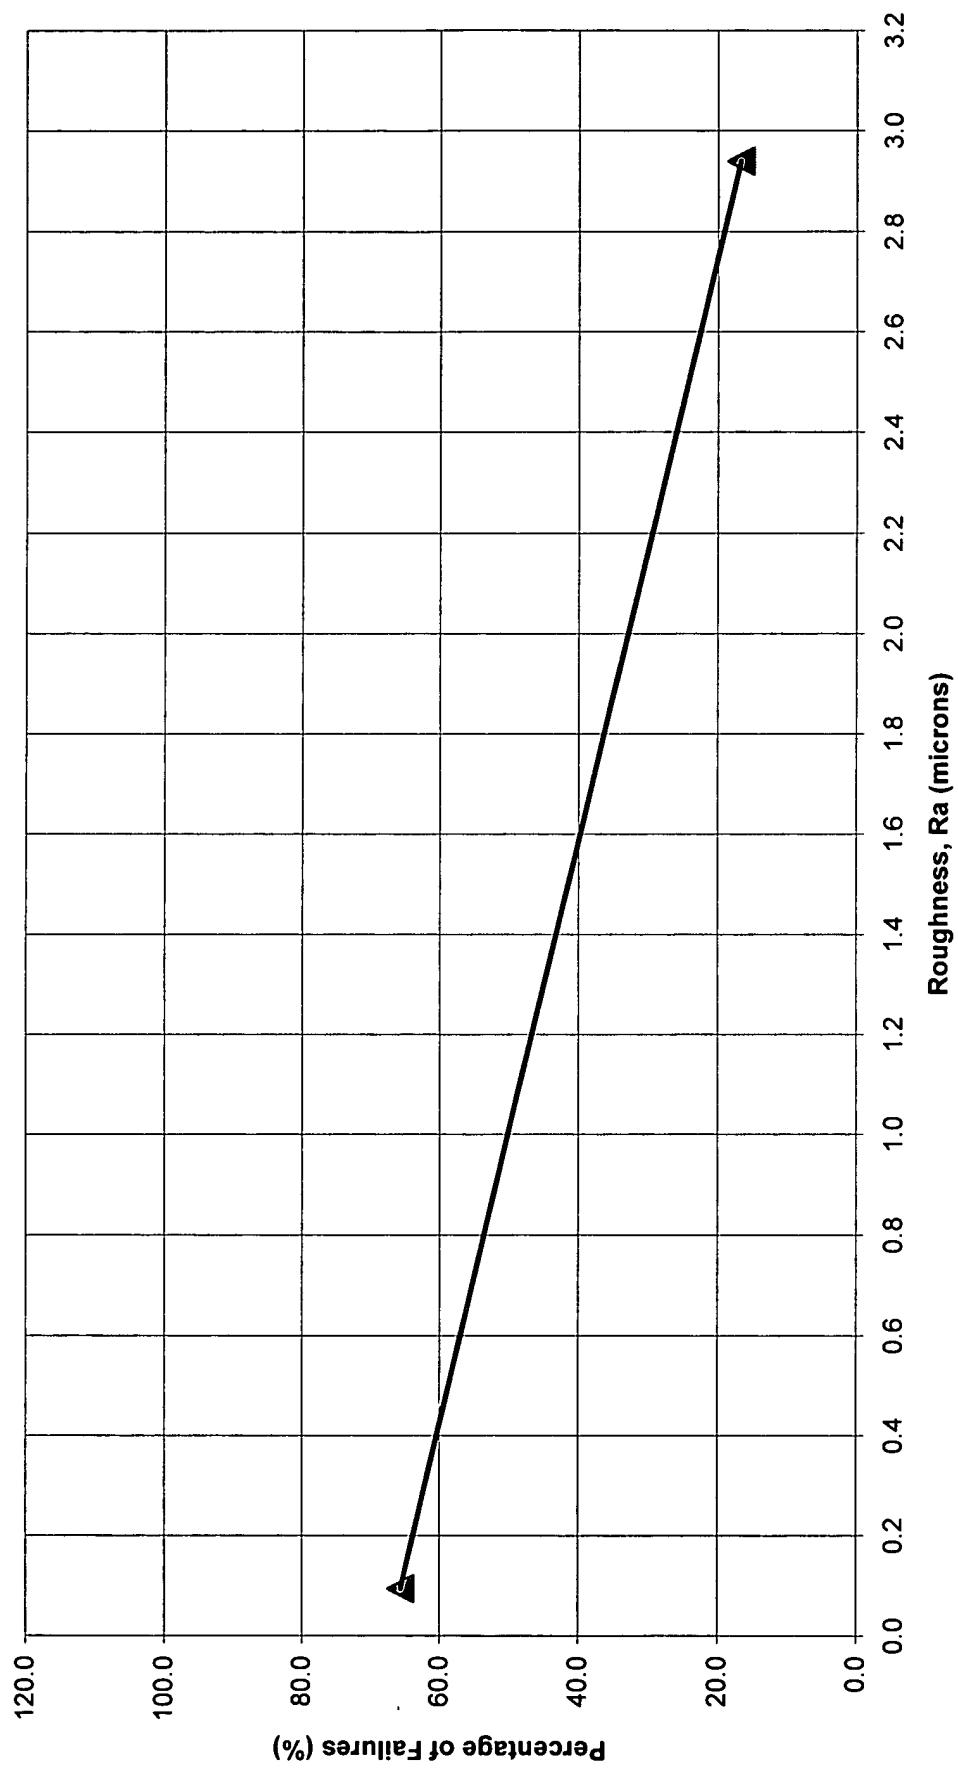


Figure 4: Adhesive B
Wall Thickness Effects on FTV Performance
Evaluation Temperature Range: -65°C to -45°C
Syringe Roughness (Ra): 2.9 microns

